


PINNING	
1	cathode Cooler (-)
2	case
3	anode Cooler (+)
4	thermistor
5	thermistor
6	anode SLD (+)
7	cathode SLD (-)
8	cathode PD (+)
9	anode PD (-)

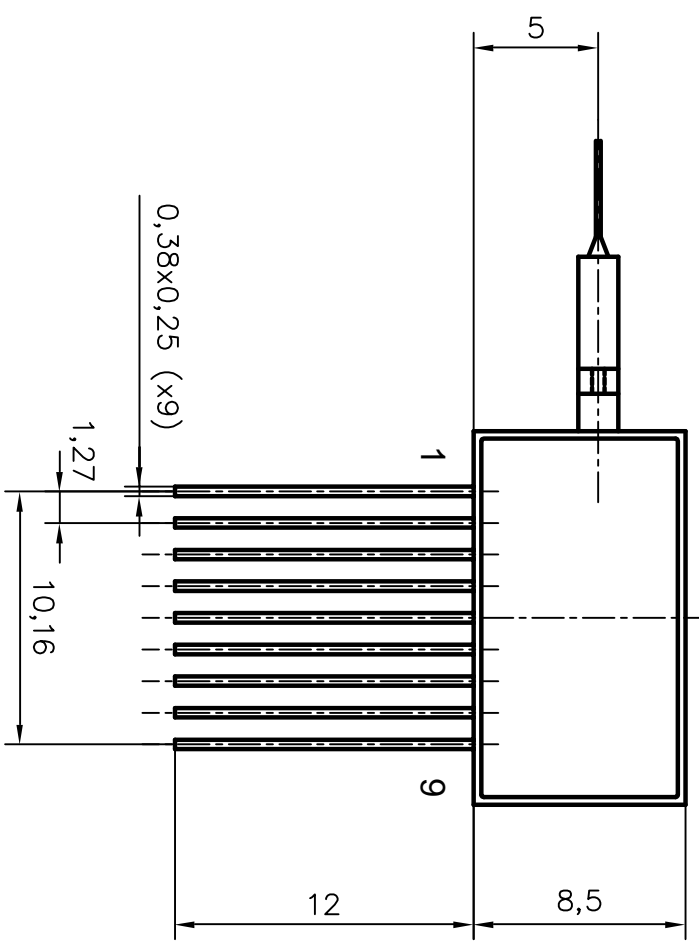

1. All dimensions in mm.
2. Tolerance $\pm 0,1$ mm.
3. Cooler current 1200 mA max.
4. Fiber length > 650 mm.

Itemref	Quantity	Title/Name, designation, material, dimension etc	Article No./Reference
Designed by VSV	Checked by XXX	Approved by - date XXX - 26/04/02	File name Mbut_cool
		Date 13/02/03	Scale 5:1

Superlum Diodes, Ltd.		MiniCoolBut	
SL.1114.00.000		Edition 6	Sheet 1/1