




Superlum

RevNo	Revision note	Date	Signature	Checked
-------	---------------	------	-----------	---------

### PINNING

1	Cooler anode (+)
2	Thermistor
3	PD anode (-)
4	PD cathode (+)
5	Thermistor
6	N/C
7	N/C
8	N/C
9	N/C
10	SLD anode (+)
11	SLD cathode (-)
12	N/C
13	Case
14	Cooler cathode (-)

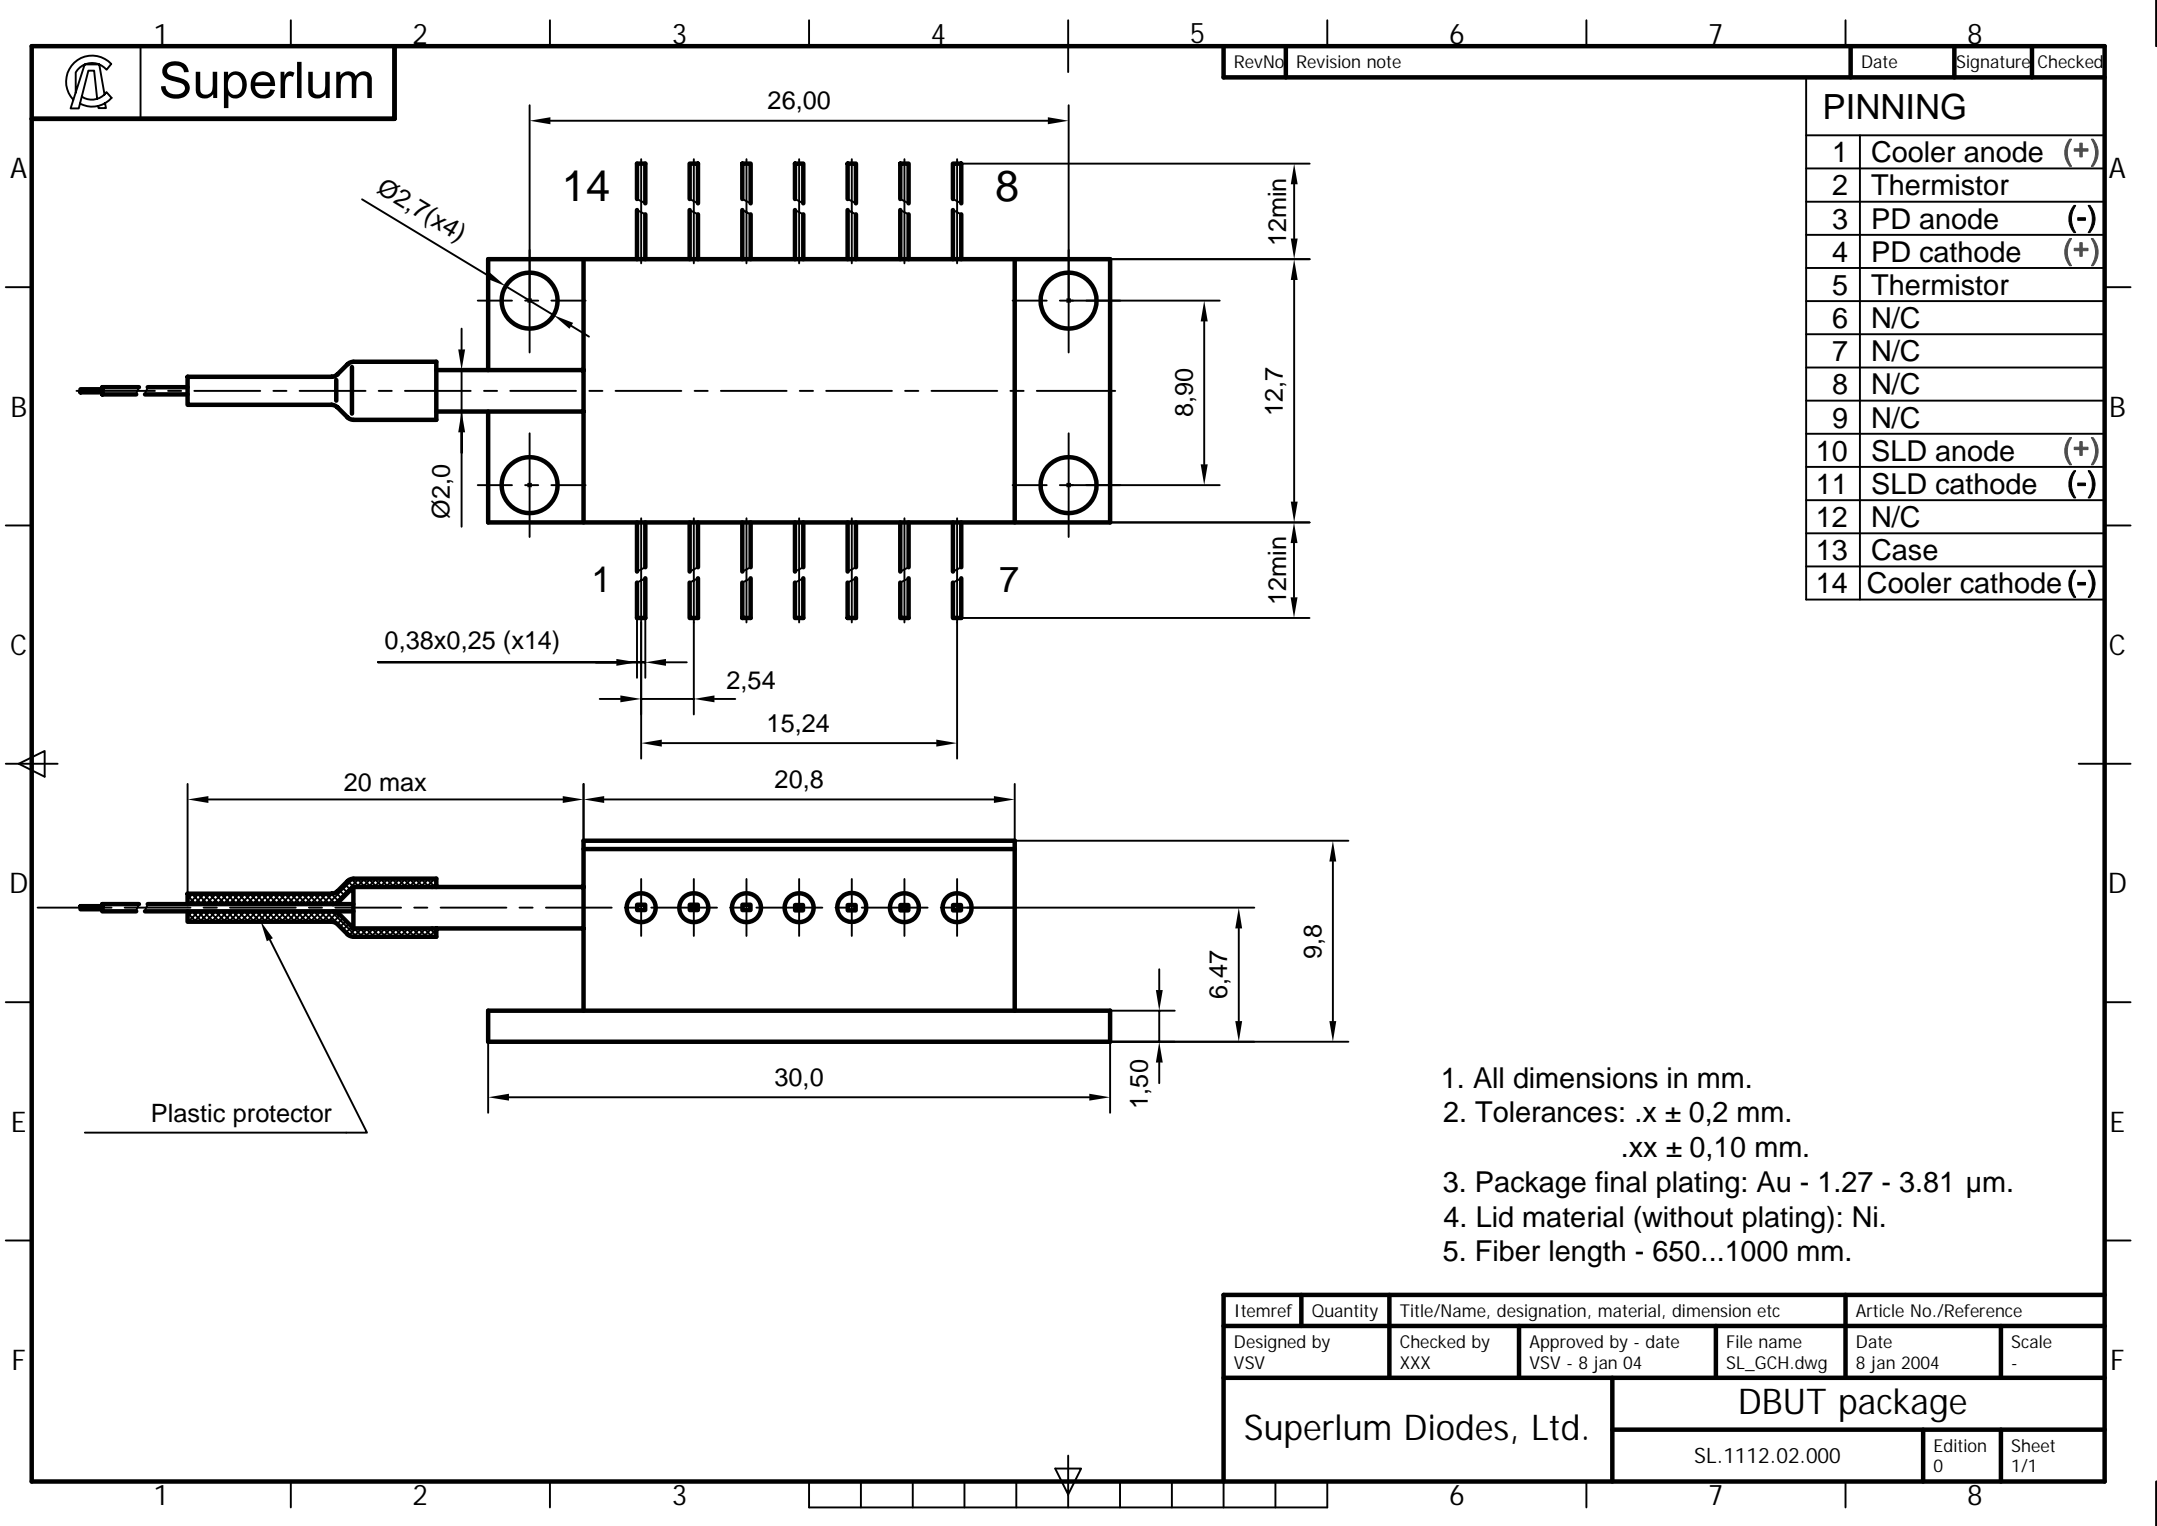

0,38x0,25 (x14)

2,54

15,24

20 max

20,8

30,0

1,50

6,47

9,8

Plastic protector

1. All dimensions in mm.
2. Tolerances: .x ± 0,2 mm.  
.xx ± 0,10 mm.
3. Package final plating: Au - 1.27 - 3.81 μm.
4. Lid material (without plating): Ni.
5. Fiber length - 650...1000 mm.

Itemref	Quantity	Title/Name, designation, material, dimension etc		Article No./Reference	
Designed by VSV	Checked by XXX	Approved by - date VSV - 8 jan 04	File name SL_GCH.dwg	Date 8 jan 2004	Scale -
Superlum Diodes, Ltd.			DBUT package		
			SL.1112.02.000	Edition 0	Sheet 1/1